


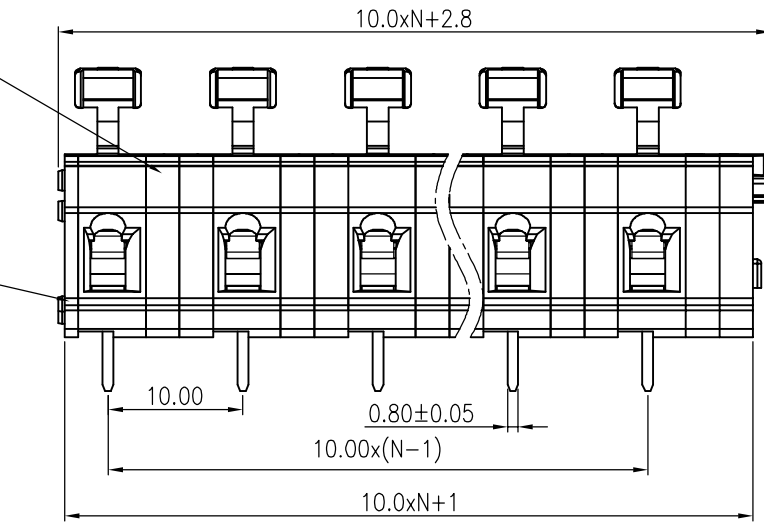


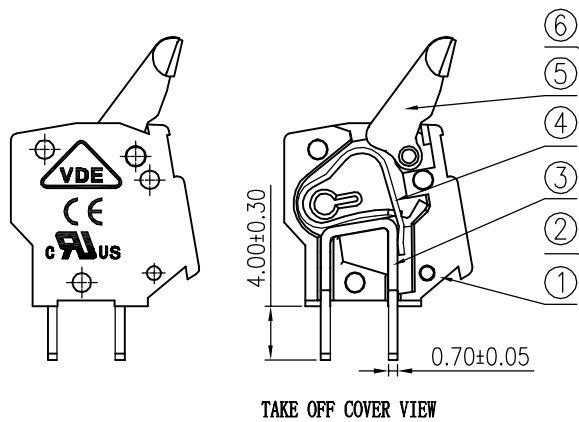

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		图面更新	LJH	04/24/09*
△	09-0120	增加VDE刻字及参数	GHY	11/23/09*

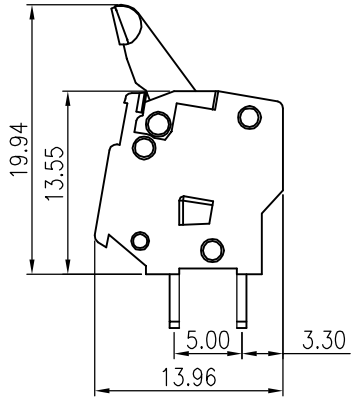


- Notes:
- 1. Pitch:10.0mm , Poles:XXP
 - 2. Rated voltage/current:UL 300V/15A
△ VDE 1000V/17A
 - 3. Operation temperatures:-40℃~+105℃
 - 4. Withstanding Voltage:AC2000V/1Min
 - 5. Insulation Resistance:5000MΩ/DC1000V
 - 6. Wire Range:28~12AWG, 0.2~2.5mm²
 - 7. Undimensioned Tolerances:

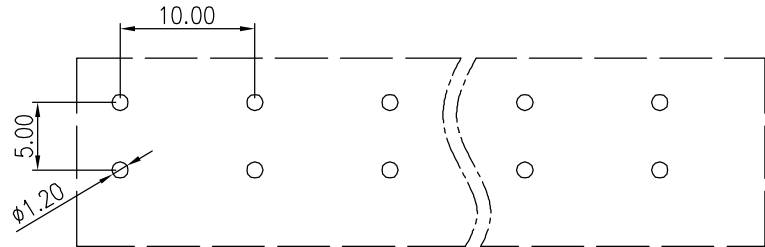

TOP VIEW-LAYOUT

Pitch range in mm			Nominal dimension range in mm							—
to	over	over	to	over	over	over	over	over	over	⌋
6	6 to 10	10 to 24	30	30 to 60	60 to 100	100 to 150	150	150	150	⌋
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	±1.0	±1.0	0.05/10

6	DG242R-7.5-Calpboard	3026H0Y01A(H)	2XX	PA66	UL94V-0
5	DG243-Button	3027D1701A(H)	XX	POM	UL94HB
4	DG242V-Shrapnel	X000000990(H)	XX	Stainless steel	
3	DG242R-Pin header	3026B00010(H)	XX	Phosphor bronze	SnCe
2	DG242R-Cover	3026C0Y01A(H)	1	PA66	UL94V-0
1	DG242R-5.0-Housing	3026A0Y01A(H)	XX	PA66	UL94V-0

ITEM		NAME OF PART		NO. OF PART		Q'TY		MATERIAL		NOTES	
DETACHED LISTS	← MM (INCH) →		DFTO L JH	DATE 04/06/09*		 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD					
	TOLERANCES EXCEPT AS NOTED		CHKD	DATE							
			MFO	DATE							
			APPVL	DATE							
	MM .0 ± .00 ± .000 ±		± ± ±		NAME DG242R-10.0-XXP-1Y-01A(H)		DRAWING NO. DG242R-10.0-E01 /PART NO. SHEET 1 OF 1				
	ANGLES ± 1°		G.E :								
			FINISH :								
	THIRD ANGLE PROJECTION		SCALE : 1:1		DO NOT SCALE DRAWING						